



PRODUCT INTRODUCTION

GALLO ACOUSTICS








## Specifications

Frequency Response:	On wall, ceiling or floor stand 100Hz to 18Khz On Tabletop 120Hz to 18Khz 89dB/w 2.8v (1m) 8 Ohms 100 Watts 95.5 cm
Sensitivity:	3 "full range
Nominal Impedance:	None
Power Handling:	4" Sphere
Height on Floor Stand:	795g
Driver:	





### Crossover

GALLO ACOUSTICS

# Micro



# Micro SE

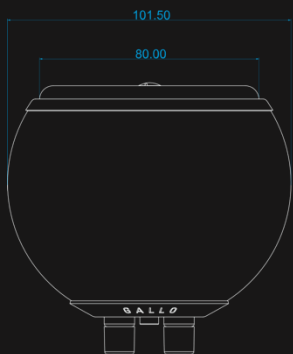

## Specifications

Frequency Response:	On wall, ceiling or floor stand 100Hz to 22Khz On Tabletop 120Hz to 18Khz 85dB/w 2.83v (1m) 4 Ohms 125 Watts 95.5 cm
Sensitivity:	3 " wide-dispersion flat diaphragm
Nominal Impedance:	None
Power Handling:	4" Sphere
Height on Floor Stand:	737g
Driver:	
Crossover	
Dimensions:	
Weight:	





## Specifications

### Frequency Response:

On wall	76Hz to 20Khz
On floor stand	95Hz to 20Khz
Sensitivity:	88dB/w 2.83v (1m)
Nominal Impedance:	8 Ohms

### Power Handling:

Full range
Crossover
Height on Floor Stand


Driver:	50 Watts
Crossover	100 Watts
Dimensions:	97.7cm
Weight:	3 "full range

None


5" C. J.

GALLO ACOUSTICS

# A'Diva

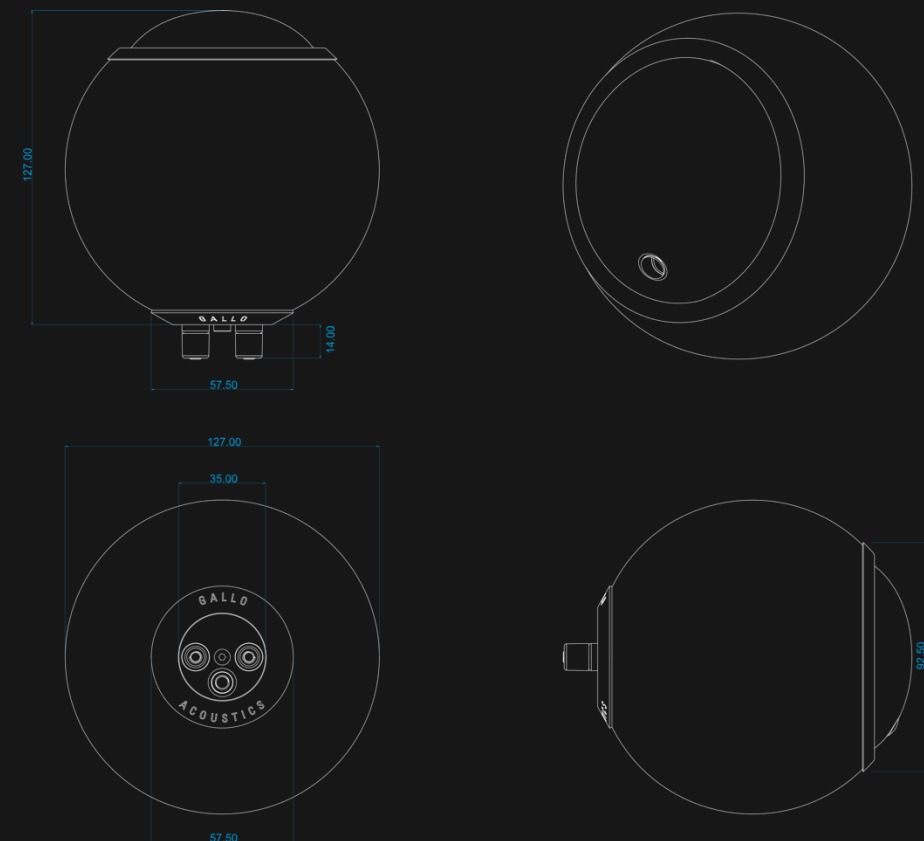

# A'Diva SE

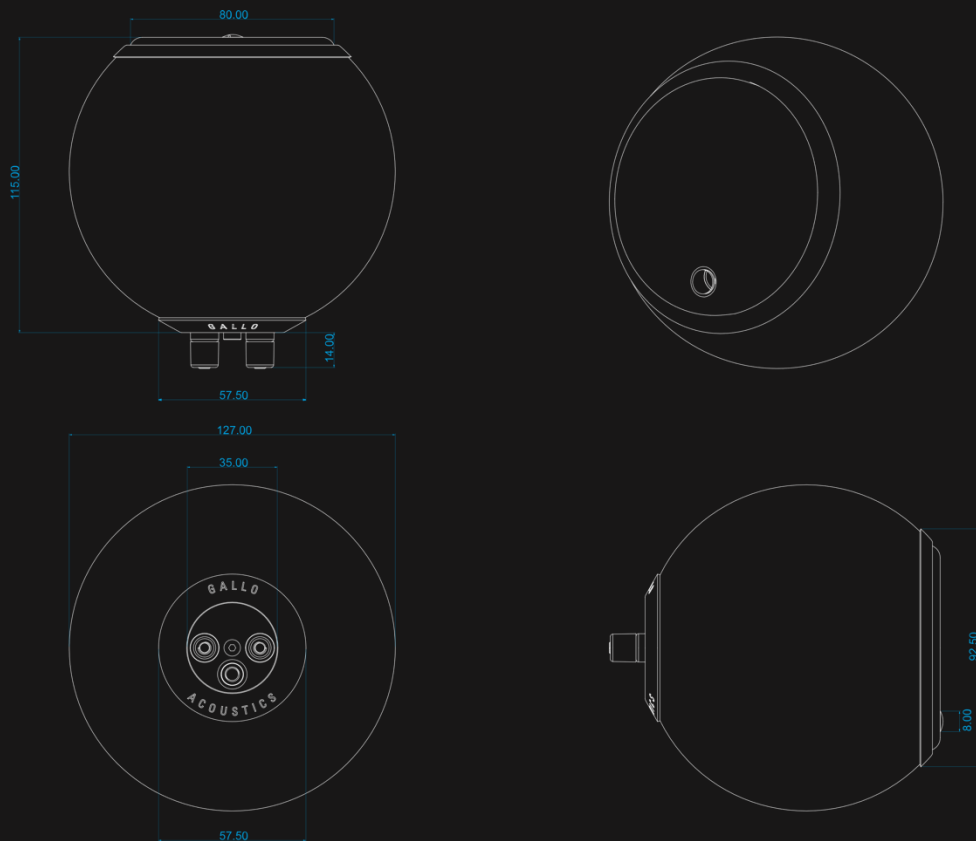

## Specifications

Frequency Response:	On wall, ceiling or floor stand 80Hz to 22Khz On Tabletop 100Hz to 18Khz 88dB/w 2.83v (1m) 4 Ohms 125 Watts 97.7 cm
Sensitivity:	3 " wide-dispersion flat diaphragm
Nominal Impedance:	None
Power Handling:	4" Sphere
Height on Floor Stand:	963g
Driver:	
Crossover	
Dimensions:	
Weight:	




## Specifications

Audio Specification:	As per individual product pages
Cable Length:	2m
Ceiling Rose:	Black & White included as standard
Cable Colours:	Black (White on Satin White Variants)
Optional Cable Colours:	8 further colours available on request

GALLO ACOUSTICS

# Droplets

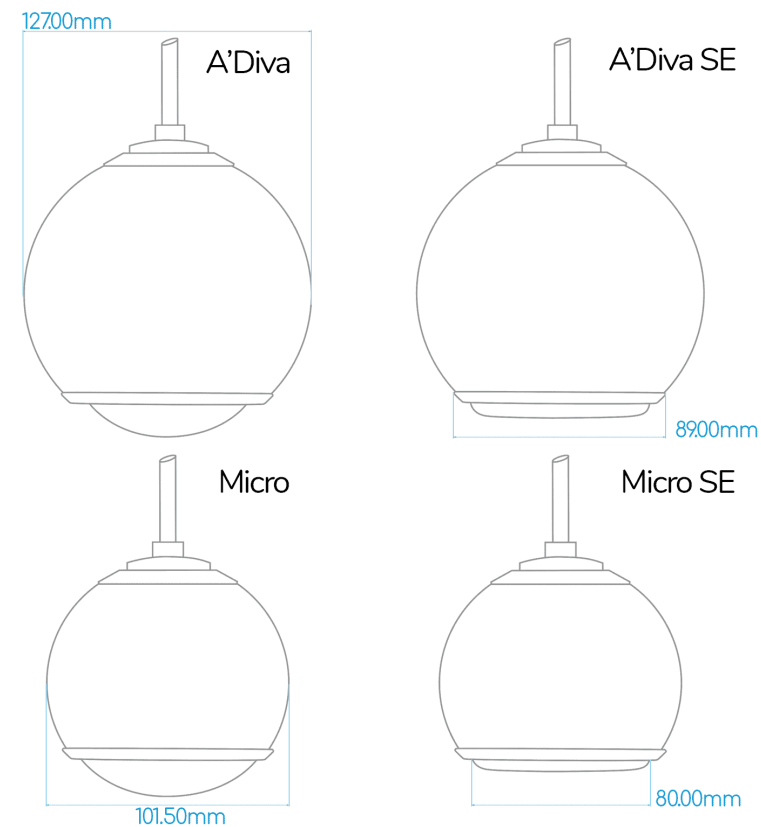




## Specifications

Frequency Response:	68Hz to 20Khz
Sensitivity:	90 dB/1 Watt/1 meter
Nominal Impedance:	8 Ohms
Power Handling:	150 Watts RMS unclipped music power. Minimum suggested power 10 Watts RMS
Finishes:	Brushed stainless steel spheres with a black frame
Tweeter	Patented CDT3 (Cylindrical Diaphragm Transducer) sporting 180° horizontal dispersion from 6kHz to above 20kHz. Two 4" dynamic hyperbolic carbon fibre drivers optimised to integrate seamlessly with the CDT3 tweeter without the need for a crossover.
Woofers	None Sealed with Auxiliary Bass Cavity Supplementation and Patented S2 loading. 5.2kg 127mm (W) x 343mm (H) x 191mm (D) 5 way gold plated binding posts Powder coated cast aluminium chassis with brushed stainless steel spheres and powder coated stainless steel grilles.
Crossover	5 Years Parts and Labour
Enclosure Type	
Weight	
<u>Dimensions:</u>	
Connections	
Enclosure Material	

GALLO ACOUSTICS


# Strada 2

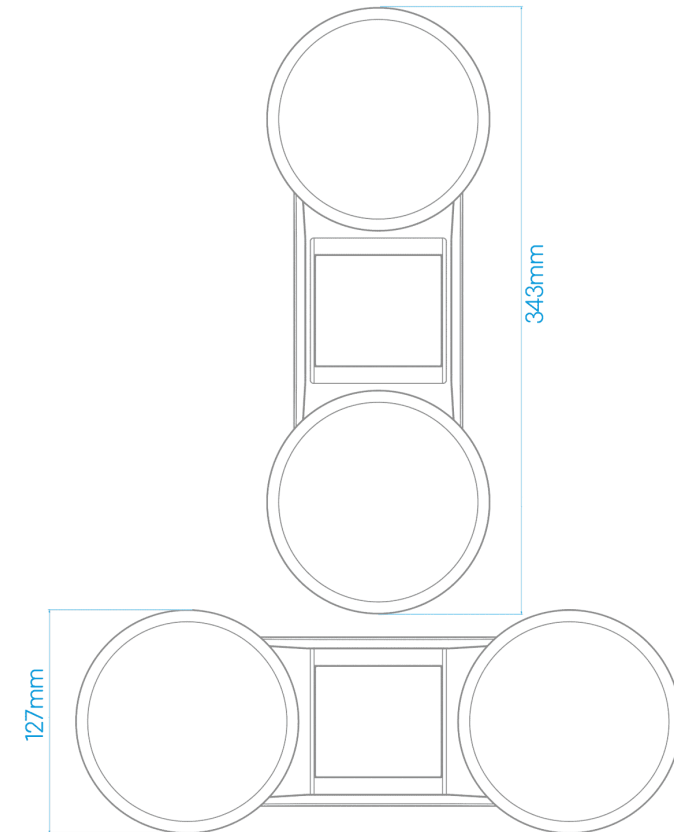



GALLO ACOUSTICS

# Profile Series

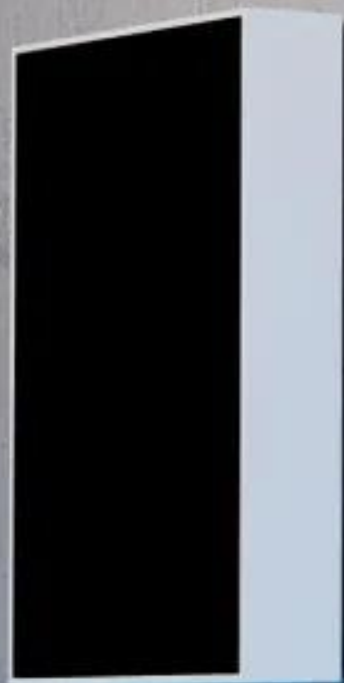

Profile1



Power Handling:	50W
Frequency Response:	80Hz to 20khz
Sensitivity:	86db
Nominal Impedance:	4 Ohm
Dimensions:	280mm (H) x 210mm (W) x 91mm (D)
Weight:	3.2kg

Profile2



Power Handling:	70W
Frequency Response:	75Hz to 20khz
Sensitivity:	87db
Nominal Impedance:	8 Ohm
Dimensions:	340mm (H) x 240mm (W) x 91mm (D)
Weight:	4.6kg

Profile3



Power Handling:	100W
Frequency Response:	65Hz to 20khz
Sensitivity:	89db
Nominal Impedance:	4 Ohm
Dimensions:	450mm (H) x 320mm (W) x 91mm (D)
Weight:	7.1kg

Profile4



Power Handling:	120W
Frequency Response:	59Hz to 20khz
Sensitivity:	88db
Nominal Impedance:	4 Ohm
Dimensions:	560mm (H) x 390mm (W) x 91mm (D)
Weight:	10.4kg

Profile2.5




Power Handling:	70W
Frequency Response:	72Hz to 20khz
Sensitivity:	86db
Nominal Impedance:	4 Ohm
Dimensions:	564mm (H) x 164mm (W) x 91mm (D)
Weight:	5.8kg

Profile3.5



Power Handling:	100W
Frequency Response:	64Hz to 20khz
Sensitivity:	89db
Nominal Impedance:	4 Ohm
Dimensions:	810mm (H) x 190mm (W) x 91mm (D)
Weight:	8.9kg

# TR-3D Subwoofer

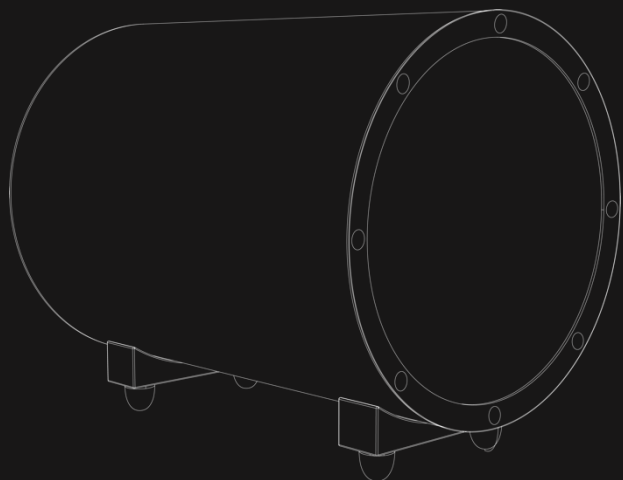


## Specifications

<b>In-room frequency response</b>	18Hz – 180Hz +/- 3db
<b>Digital power amp</b>	300 Watts RMS, 600 Watts max.
<b>Phase</b>	0/180 switch
<b>Low pass</b>	50 to 180Hz, continuously variable with LFE by-pass switch
<b>High pass</b>	100Hz fixed, 1st order on high-level output
<b>Bass EQ</b>	0, +3dB, +6dB 25 Hz center frequency
<b>Power</b>	Auto/On/Off: toggle Switch
<b>Dimensions:</b>	275mm (W) x 305mm (H) x 345mm (D)
<b>Enclosure type</b>	Hardened steel with S2 Bass loading
<b>Connections</b>	2 female RCA phono inputs and 2 female RCA phono outputs (pass-thru) 5-way gold plated binding posts 10" long throw ceramic coated aluminium 2 Years Parts and Labour



# Profile Sub


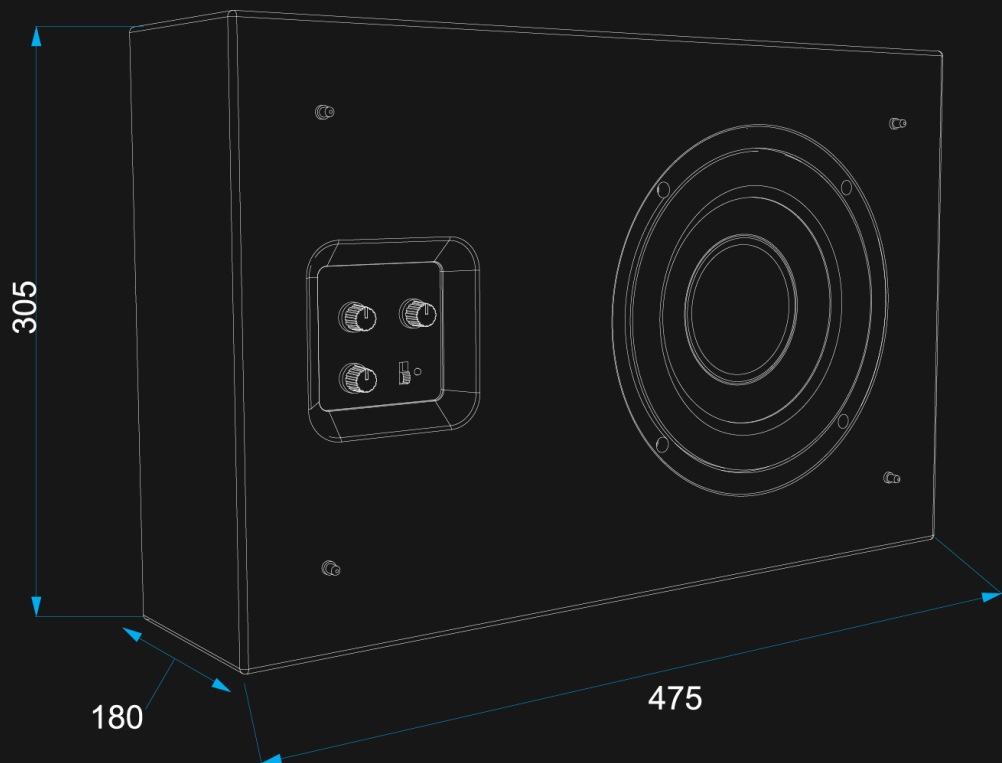


## Specifications

Frequency Response	32Hz – 220Hz +/- 3db
Digital Power Amp	150 Watts
Woofer	8" woofer with PP cone and NBR surround
Phase	0 – 180° continuously variable
Active low pass filter	50 to 180Hz, continuously variable
Power	Auto/On/Off: toggle switch
Dimensions	475mm (W) x 305mm (H) x 180mm (D)
Weight	10.5kg
Enclosure Material	MDF (Medium Density Fibreboard)
Connectors	2 female RCA phono inputs
Warranty	2 Years Parts and Labour

GALLO ACOUSTICS

# ROOMSUB

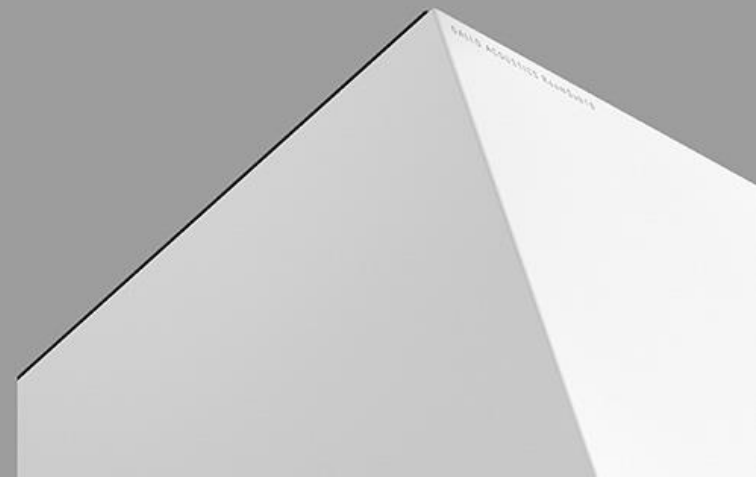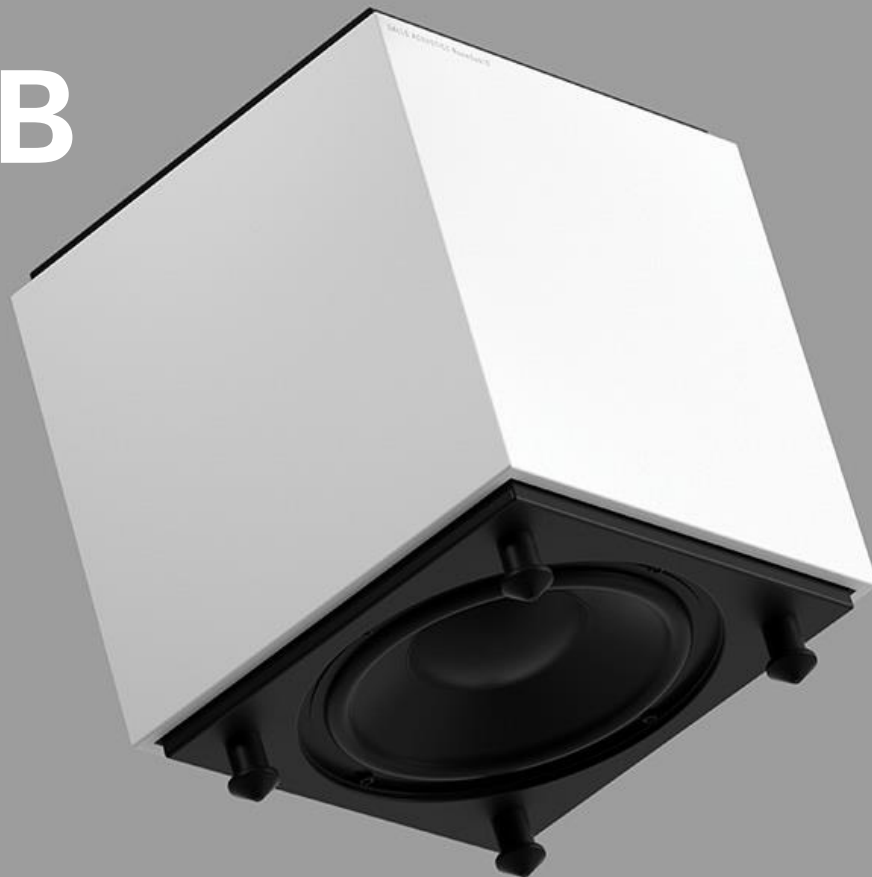

## Specifications


### RoomSub 8

Frequency Response	32Hz – 150Hz +/- 3db
Class D Digital Power Amp	200 Watts
Active low pass filter	50 to 180Hz, continuously variable
Woofer	8" woofer with PP cone and NBR surround
Weight	12kg
Enclosure Material	MDF (Medium Density Fibreboard)
Warranty	2 Years Parts and Labour


### RoomSub 10

Frequency Response	32Hz – 160Hz +/- 3db
Class D Digital Power Amp	300 Watts
Active low pass filter	50 to 180Hz, continuously variable
Woofer	10" woofer with PP cone and NBR surround
Weight	19kg
Enclosure Material	MDF (Medium Density Fibreboard)
Warranty	2 Years Parts and Labour

### RoomSub 8

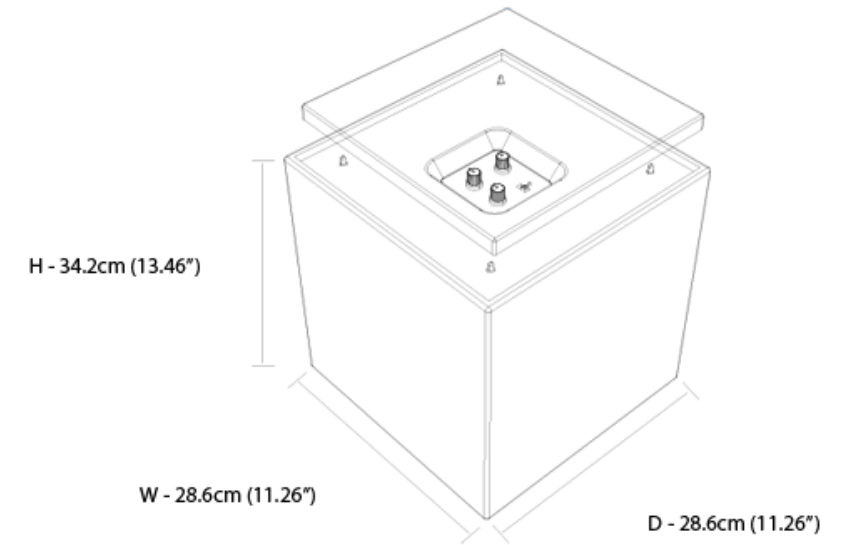

### RoomSub 10

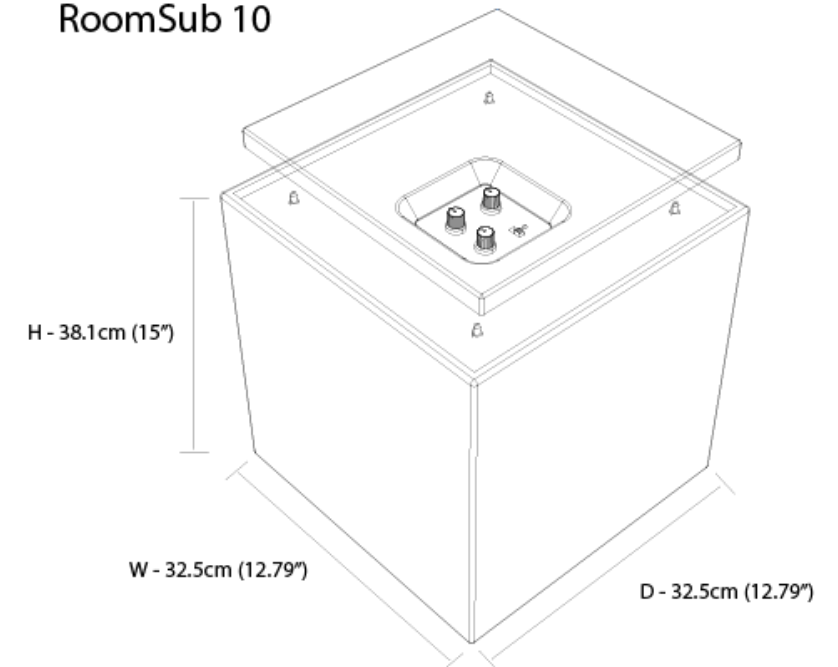

# Habitat



## Specifications

Frequency Response:  
Sensitivity:  
Nominal Impedance:  
Power Handling:  
Crossover  
Driver:  
Dimensions:  
Weight:  
Cone Material  
Enclosure Material  
IP Rating  
Operating Temperature  
Warranty

### MICRO

100Hz to 20Khz  
86 +/- 2 dB/ (1m)  
8 Ohms  
Full range – 50 Watts  
With crossover – 100 Watts  
None  
3" Full range  
4" Sphere  
745g excl. cable  
Mical polypropylene compound  
Marine grade stainless steel (316)  
IP66  
-20 to +50 °C  
5 years

### A'DIVA

80Hz to 20Khz  
85 +/- 2 dB/ (1M)  
8 Ohms  
Full range – 50 Watts  
With crossover – 100 Watts  
None  
3" Full range  
5" Sphere  
970g excl. cable  
Mical polypropylene compound  
Marine grade stainless steel (316)  
IP66  
-20 to +50 °C  
5 years





## DROPLET LIGHT

ASK TEAM FOR DETAILS...





# Droplet Light GU10







CUSTOM COLOURS

ASK TEAM FOR DETAILS...



HABITAT INSTALL



FULLY CUSTOMISED  
ASK TEAM FOR DETAILS...

